
Acid Waste Piping Systems





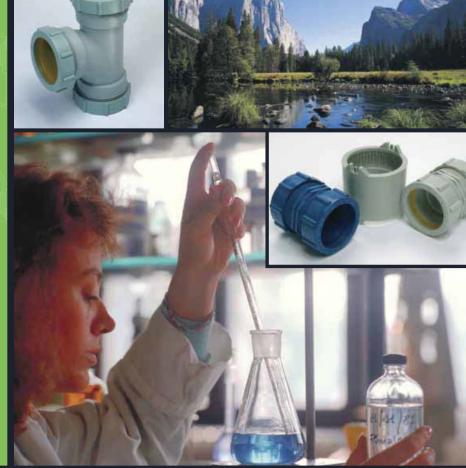

YOUR LAB SPECIALIST

- Enfield™ Electrofusion Acid Waste Systems FRPP & NRFPP
- Labline® Mechanical-Joint Acid Waste System FRPP
- Plenumline[™] Mechanical Joint Acid Waste System FR-PVDF
- Encase™ Double Containment System PP & FRPP
- Neutratank® Neutralization Tanks HDPE & PP
- Floway™ Drains PP
- Neutrasystem2™ Monitoring

IPEX
Committed to Excellence

We build tough products for tough environments®.

Integrated Total Laboratory SOLUTIONS

For more than 30 years, IPEX has been supplying industrial, commercial, school and hospital laboratories throughout North America with high-quality, easy-to-install acid waste systems designed to handle a wide variety of chemicals and pH levels.

Our comprehensive line of dedicated acid waste conveyance, neutralization and monitoring systems offers innovative features not available with any other system. In fact, IPEX EnfieldTM electrofusion and Labline[®] mechanical joint systems have long been recognized as the industry benchmark for performance and reliability, and are among the most widely specified systems in North America. Also available through IPEX is the next generation, E-84 compliant PlenumlineTM system, made of flame retardant PVDF for extremely demanding applications such as return-air plenums.

The complete range of IPEX integrated total solutions for acid waste applications also includes our Neutratank® neutralization tanks, Neutrasystem2TM pH monitoring system and FlowayTM drains, as well as EncaseTM double containment systems.

Increasingly stringent government and industry standards, along with the widespread public desire to minimize the impact of chemical waste on the environment, continues to make compliance a vital concern for our customers.


- IPEX offers a complete range of pipe and fittings in a variety of materials to suit any acid waste application.
- With the ability to handle intermittent temperatures from -10°F to 212°F and self extinguishing properties, our flame-retardant polypropylene (FRPP) systems are ideally suited for all above-grade laboratory applications.

- With identical chemical/temperature properties for belowgrade installations, our non-flame-retardant polypropylene (NFRPP) is the material of choice.
- Specifically designed and approved for use in return-air plenums or higher temperature/higher concentration applications, IPEX offers a flame-retardant polyvinylidenefluoride (FR-PVDF) system.

Compared to conventional ductile iron and borosilicate glass systems, all three IPEX thermoplastic materials exhibit excellent resistance to a wide range of chemicals with pH from 1 to 13 and will not corrode, rust, pit or scale and offer much greater flexibility/impact resistance. The result: far easier installations, low maintenance and substantial cost savings over the life of the systems.

YOUR FULL-SPECTRUM ACID WASTE SPECIALIST

ENFIELD*
LABLINE*
PLENUMLINE*
FLOWAY*
NEUTRATANK*
NEUTRASYSTEM2**

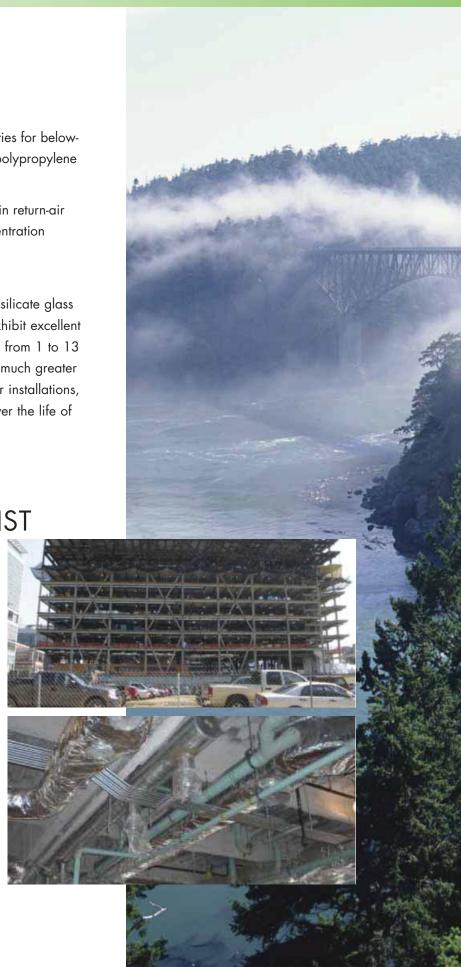

ENFIELDTM ELECTROFUSION ACID WASTE SYSTEMS

ENFIELD

Enfield electrofusion fittings are molded with an integral resistance wire in the socket, with jointing completed by energizing the resistance wire via a microprocessor controlled Enfusion Control Unit. The result of these innovations is an unparalleled level of joint reliability and repeatability. Enfield has proven over time that it produces the optimum level of performance where it matters most — at the joint interface. It offers unprecedented control of jointing — controlled fit, controlled temperature and controlled time.

Enfield offers polypro fittings, constructed with a heavy gauge resistance wire that is integrally molded into the socket. These are considered to be the premier fittings on the market.

ADVANTAGES

POSITIVE RELIABLE JOINTS made in 2 minutes – installation time is reduced

SEVERAL JOINTS CAN BE MADE AT ONE TIME

PROVEN RELIABILITY for over a decade

ENFIELD IS MANUFACTURED FROM POLYPROPYLENE which has an operating temperature range from -10°F to 212°F. *This allows systems to be flushed with boiling water

HEAVY GAUGE RESISTANCE WIRE molded into sockets – no loose components, controlled fusion of joints

EASY CONNECTING heavy duty socket terminal posts complete with protection ears

MICROPROCESSOR CONTROLLED ENFUSION UNIT ensures secure joints and joint repeatability

MATCHED SYSTEM – high quality pipe and fittings are matched to give ease of installation and long term reliability

EASY TO INSTALL - even in difficult areas

INSTALLED COST 50% LESS THAN GLASS

BREAKAGE FACTOR ELIMINATED

MAINTENANCE FREE





SHORT FORM SPECIFICATIONS

GENERAL

Acid waste drain and vent system, as shown on drawings, shall be NSF listed and CSA certified Schedule 40, polypropylene as manufactured by IPEX. System to include pipe supplied in 10 ft. lengths (or 20 ft lengths if NFRPP is specified), fittings, traps and neutralization tanks from the same manufacturer. It shall also include recommended adapters to connect to other piping materials, where applicable.

MATERIAL

Pipe shall be made from NSF listed Type 110 or 210, flame retardant polypropylene conforming to ASTM D4101, with a maximum average flame spread of zero seconds and a maximum extent of burning of 13 mm, in accordance with ASTM D635. Matched fittings shall be made from NSF listed flame retardant polypropylene with average maximum burn time of 80 seconds and maximum extent of burning of 20 mm in accordance with ASTM D635.

If NFRPP pipe is specified, it shall be made from NSF 14 listed and CSA certified Schedule 40 PP as manufactured by IPEX. Pipe shall comply with ASTM F1412 and material used shall comply with the material requirements of ASTM D4101.

FITTINGS

Fittings shall be NSF listed and have an integral heavy gauge, nickel/chrome electrical resistance wire molded in place in the fitting body. Copper wire elements, loose wire or other loose joint components, are prohibited.

Fittings shall be Enfield or approved equal.

JOINTS

Connections between polypropylene pipe and fittings shall be made using the Enfield joint. All joints shall have a fusion cycle controlled by a microprocessor operated, waterproof, Enfusion control unit equipped with input and output voltage sensors, ambient temperature sensors to automatically adjust fusion time and audible alarms to indicate cycle interruptions and completion of the joining process. The unit shall be capable of fusing multiple joints and with a minimum capability of eight 2" joints with the same fusion time as a single joint.

Connections between polypropylene and other piping materials shall be made using Enfield adapters according to manufacturer's (IPEX) recommendations. All electrofusion machines shall be third party certified by UL and CSA.

INSTALLATION AND TESTING

Installation and testing shall be in accordance with the contract drawings, the manufacturer's recommendations and the local plumbing codes. Testing with compressed air is prohibited. The entire system shall be installed free of stress and in proper alignment. Horizontal supports shall provide a wide bearing area and be free of burrs or sharp edges. Support spacings shall be in accordance with the manufacturer's recommendations and local plumbing codes. Vertical piping shall have riser clamps at each floor. Pipe supports should be installed so that horizontal piping is in uniform alignment and with a uniform slope of at least 1/8" per foot or in accordance with the local plumbing codes.

ENFIELDTM ELECTROFUSION ACID WASTE SYSTEMS

PRODUCT SELECTION CHART

Dimension inches	Significant Number	Product Code			
AW POLYPROPYLENE PIPE FLAME RETARDANT Sch 40					
1-1/2	W001	146001			
2	W002	146002			
3	W003	146003			
4	W004	146004			
6	W006	146006			
8	W008	146008			
10	W010	146010			
12	W012	146012			
	### Inches FLAME RETARD 1-1/2 2 3 4 6 8 10	inches Number FLAME RETARDANT Sch 40 1-1/2 W001 2 W002 3 W003 4 W004 6 W006 8 W008 10 W010			

	Dimension inches	Significant Number	Product Code		
AW POLYPROPYLENE PIPE FLAME RETARDANT Sch 40					
	1-1/2	W001-20	146031		
	2	W002-20	146032		
()	3	W003-20	146033		
	4	W004-20	146034		
0011	6	W006-20	146036		
20' Lengths Note: 20' Schedule 40	8	W008-20	146038		
FR pipe is a non-stock	10	W010-20	146040		
item available upon special request.	12	W012-20	146042		

AW POLYPROPYLENE PIPE FLAME RETARDANT Sch 80

10' Lengths

1-1/2	WT001	146013
2	WT002	146014
3	WT003	146015
4	WT004	146016

AW POLYPROPYLENE PIPE FLAME RETARDANT Sch 80



1-1/2	WT001-20	146022
2	WT002-20	146023
3	WT003-20	146024
4	WT004-20	146025

20' Lengths

Note: 20' Schedule 80 FR pipe is a non-stock item available upon special request.

AW POLYPROPYLENE PIPE BLACK NON-FLAME RETARDANT Sch 40



1-1/2	WB01	146101
2	WB02	146102
3	WB03	146103
4	WB04	146104
6	WB06	146106
8	WB08	146108
10	WB10	146110
12	WB12	146212

AW POLYPROPYLENE PIPE BLACK NON-FLAME RETARDANT Sch 80



20'	Lengths

1-1/2	WB1106	146201
2	WB1107	146202
3	WB1108	146203
4	WB1109	146204
6	WB1110	146206
8	WB1111	146208
10	WB1112	146210
12	WB1113	146211

BLACK NON-FLAME RETARDANT ENFIELD COUPLING



2	L162B	257147
3	L163B	257150
4	L164B	257154
6	L166B	257158
8	L168B	257161
10	L1610B	257143
12	L1612B	257145

COUPLING EJ



1-1/2	L161	257141
2	L162	257146
3	L163	257149
4	L164	257153
6	L166	257157
8	L168	257160
10	L1610	257142
12	L1612	257144

	Dimension inches	Significant Number	Product Code		Dimension inches	Sig N
ABRICATED REPAIR COU	IPLING EJ			FABRICATED 1/8 BEND E	ΞJ	
	2	L162R	257148		8	
	3	L163R	257152		10	l
	4	L164R	257156		12	
	6	L166R	257159	(lûd		
	8	L168R	257295			
				1/4 BEND (90°) EJ		
SWEEP EJ				.,	1-1/2	
VVLLI LJ	1-1/2	L171	257171	3	2	
	2	L171	257171			
	3	L172	257172			
	4	L174	257174			
	6	L176	257175	1/4 BEND (90°) EJ x Sp		
	ŭ	2170	207170		1-1/2	
					2	
90° SWEEP EJ x Sp						
	1-1/2	L281	257281			
	2	L282	257282			
	3	L283	257283	1/4 BEND EJ x Ln		
	4	L284	257284		1-1/2	
BEND EJ	6	L286	257286	E .		
21.10 10	1-1/2	L191	257191			
	2	L192	257194	FABRICATED 1/4 BEND (9	· ·	
(1)	3	L193	257195		8	
724	4	L194	257196	更	10	
<u> </u>	6	L196	257197		12	
				CANUTADY TEE E		
BEND EJ x Sp				SANITARY TEE EJ	1-1/2	_
	1-1/2	L211	257221			
	2	L212	257222		3	
	3	L213	257223			
	4	L214	257224) (Miles	4	
	6	L216	257225			

ENFIELDTM ELECTROFUSION ACID WASTE SYSTEMS

PRODUCT SELECTION CHART

	Dimension inches	Significant Number	Product Code			
FABRICATED SANITARY TE	FABRICATED SANITARY TEE EJ					
(iii)	6	L206	257214			
	8	L208	257217			
	10	L2010	257202			
	12	L2012	257205			
UUN						

	Dimension inches	Significant Number	Product Code
REDUCING DOUBLE SANI	TARY TEE EJ		
M	2 x 1-1/2	L3521	257353
	3 x 1-1/2	L3531	257355
	4 x 2	L3542	257358
(iii	4 x 3	L3543	257359

REDUCING SANITARY TEE EJ



2 x 1-1/2	L2021	257207
3 x 1-1/2	L2031	257209
3 x 2	L2032	257210
4 x 2	L2042	257212
*4 x 3	L2043	257213
* Fabricated		

45° WYE EJ



1-1/2	L371	257371
2	L372	257390
3	L373	257394
4	L374	257400
6	L376	257406

FABRICATED REDUCING SANITARY TEE EJ




6 x 2	L2062	257215
6 x 4	L2064	257216
8 x 3	L2083	257163
8 x 4	L2084	257218
8 x 6	L2086	257219
10 x 3	L20103	257164
10 x 4	L20104	257203
10 x 6	L20106	257204
10 x 8	L20108	257165
12 x 4	L20124	257166
12 x 6	L20126	257167
12 x 8	L20128	257168
12 x 10	L201210	257169

FABRICATED 45° WYE EJ



8	L378	257414
10	L3710	257372
12	L3712	257381

REDUCING WYE EJ



2 x 1-1/2	L3721	257391
3 x 1-1/2	L3731	257395
3 x 2	L3732	257396
4 x 1-1/2	L3741	257425
4 x 2	L3742	257401
4 x 3	L3743	257402
6 x 1-1/2	L3761	257426
6 x 2	L3762	257407
6 x 3	L3763	257408
6 x 4	L3764	257409

DOUBLE SANITARY TEE EJ



*1-1/2	L351	257351
2	L352	257352
3	L353	257354
4	L354	257357

^{*} Fabricated

	Significant Number	Product Code
--	-----------------------	-----------------

FABRICATED REDUCING WYE EJ




٧	IL LJ			
	8 x 2	L3782	257427	
	8 x 3	L3783	257415	
	8 x 4	L3784	257416	
	8 x 6	L3786	257421	
	10 x 3	L37103	257428	
	10 x 4	L37104	257373	
	10 x 6	L37106	257379	
	10 x 8	L37108	257380	
	12 x 3	L37123	257429	
	12 x 4	L37124	257383	
	12 x 6	L37126	257387	
	12 x 8	L37128	257388	
	12 x 10	L371210	257430	

COMBINATION WYE & 1/8 BEND (Long Turn Wye) EJ



1-1/2	L3715	257389
2	L3725	257392
3	L3735	257397
4	L3745	257403
6	L3765	257410

FABRICATED COMBINATION WYE & 1/8 BEND EJ



8	L3785	257417
10	L37105	257374
12	L37125	257384


Significant Number	Product Code

REDUCING COMBINATION WYE & 1/8 BEND EJ



ار	N WYE & 1/8	BEIND ET	
	2 x 1-1/2	L37251	257393
	3 x 1-1/2	L37351	257398
	3 x 2	L37352	257399
	4 x 1-1/2	L37451	257431
	4 x 2	L37452	257404
	4 x 3	L37453	257405
	6 x 1-1/2	L37651	257432
	6 x 2	L37652	257411
	6 x 3	L37653	257412
	6 x 4	L37654	257413

FABRICATED REDUCING COMBINATION WYE & 1/8 BEND EJ



COMBINATIO	JIN WIL ON 1/1	O DEIND EJ
8 x 3	L37853	257418
8 x 4	L37854	257419
8 x 6	L37856	257420
10 x 3	L371053	257375
10 x 4	L371054	257376
10 x 6	L371056	257377
10 x 8	L371058	257378
12 x 3	L371253	257433
12 x 4	L371254	257434
12 x 6	L371256	257435
12 x 8	L371258	257386
12 x 10	L3712510	257385

FABRICATED DOUBLE 45° WYE EJ



2	L382	257445
3	L383	257448
4	L384	257452
6	L386	257457
8	L388	257460
10	L3810	257442
12	L3812	257462

ENFIELDTM ELECTROFUSION ACID WASTE SYSTEMS

PRODUCT SELECTION CHART

Dimension inches	Significant Number	Product Code
------------------	-----------------------	-----------------

REDUCING DOUBLE 45° WYE EJ



/VIL LJ			
*2 x 1-1/2	L3821	257446	
6 x 4	L3864	257458	
* Fabricated			

	inches	Number	Code
REDUCING TRUE WYE EJ			
	2 x 1-1/2	L3421	257343
	3 x 2	L3432	257344
	4 x 3	L3443	257345

Dimension

FABRICATED REDUCING DOUBLE 45° WYE EJ



3 x 2	L3832	257449
4 x 2	L3842	257453
4 x 3	L3843	257454
8 x 6	L3886	257461
10 x 4	L38104	257443
10 x 6	L38106	257463
10 x 8	L38108	257444
12 x 4	L38124	257464
12 x 6	L38126	257465
12 x 8	L38128	257466
12 x 10	L381210	257467
12 // 0		

CLEANOUT Sp



1-1/2	L241	257232
2	L242	257235
3	L243	257238
4	L244	257241
*6	L246	257244
*Fabricated		

Significant

Product

CLEANOUT PLUG Male Thread



1-1/2	L241A	257233
2	L242A	257236
3	L243A	257239
4	L244A	257242

FABRICATED DOUBLE COMBINATION WYE & 1/8 BEND EJ



2	L3825	257447
3	L3835	257450
4	L3845	257455
6	L3865	257459

CLEANOUT W/ BRASS PLUG Sp




1-1/2	L2401	257246
2	L2402	257231
3	L2403	257247
4	L2404	257248

FABRICATED REDUCING DOUBLE COMBINATION WYE & 1/8 BEND EJ



3 x 2	L38352	257451
4 x 2	L38452	257456

FABRICATED CLEANOUT TEE EJ



1-1/2	L901	257551
2	L902	257552
3	L903	257553
4	L904	257554
6	L906	257555

TRUE WYE EJ



1-1/2	L341	257341
2	L342	257342

	Dimension inches	Significant Number	Product Code
FABRICATED CAP EJ			
	1-1/2	L641	257541
	2	L642	257543
	3	L643	257544
	4	L644	257545
	6	L646	257546
	8	L648	257547
	10	L6410	257542
	12	L6412	257548
flange – ASA 150 EJ			
	1-1/2	L361	257361
	2	L362	257365
	3	L363	257366
	4	L364	257367
	6	L366	257368
FABRICATED FLANGE – AS	SA 150 EJ		
	8	L368	257369
	10	L3610	257362
	12	L3612	257363
FABRICATED BLIND FLANC	GE – ASA 150		
	8	L3688	257370
	10	L361010	257360
	12	L361212	257364

	Dimension inches	Significant Number	Product Code
EDUCING BUSHING Sp :	x EJ		
	2 x 1-1/2	L3912	257472
	** 3 x 1-1/2	L3913	257473
	3 x 2	L3923	257476
	** 4 x 1-1/2	L3914	257474
	4 x 2	L3924	257477
	4 x 3	L3934	257479
	6 x 1-1/2	L3916	257475
	6 x 3	L3936	257480
	6 x 4	L3946	257483
	8 x 3	L3938	257481
	8 x 4	L3948	257484
	8 x 6	L3968	257486
	10 x 4	L39410	257482
	10 x 6	L39610	257485
	10 x 8	L39810	257487
	12 x 4	L39412	257489
	12 x 6	L39612	257490
	12 x 8	L39812	257488
	12 x 10	L391012	257471
	** Discontinued	d when stock is	depleted

ADAPTER FEMALE Thread x LN



1-1/2 L101 257101

ADAPTER EJ x LN



1-1/2 L111 257111

MALE ADAPTER EJ $\, x \,$ Male Thread



1-1/2	L141	257121
2	L142	257122

ENFIELDTM ELECTROFUSION ACID WASTE SYSTEMS

PRODUCT SELECTION CHART

Dimension inches	Significant Number	Product Code

FEMALE ADAPTER EJ x Female Thread



1-1/2	L151	257131
2	L152	257132

GLASS ADAPTER EJ x Bead



1-1/2	L451	257501
2	L452	257502
3	L453	257503
4	L454	257504

CAST IRON ADAPTER EJ x Sp



1-1/2	L461	257511
2	L462	257512
3	L463	257513
4	L464	257514

3" or 12" FRPP TAIL PIECE ADAPTER



1-1/2 x 3	W303	257133
1-1/2 x 12	W3012	257134

C/W SPIG X BRASS COMPRESSION RING

1-1/2" x 12" FRPP SWIVEL SINK STRAINER ADAPTER Spg x Female Thread



1-1/2 x 12	W5512	257090
C/W VITON® G	ASKET	

FRPP SWIVEL SINK STRAINER ADAPTER Spg \boldsymbol{x} Female Thread



1-1/2	W551	257093
*1-1/2	W551G	156450

C/W VITON® GASKET

	Dimension inches	Significant Number	Product Code
TRAP – 2 PIECE EJ			
	1-1/2	L1021	257104
	2	L1022	257105
	Shipped as 2 p	ieces	

FABRICATED P TRAP - 2 PIECE EJ



8	LT18	257566	
10	LT110	257562	
Shipped as 2 pieces			

PTRAP - 3 PIECE EJ



3	LT13	257563
4	LT14	257564
6	LT16	257565
Shipped as 3 pieces		

COBRA PIPE CLIP



1-1/2	434310	437345
2	434311	437346
2-1/2	434312	437347
3	434313	437348
4	434314	437349
6	434317	437332

PIPE CLIP



	1-1/2	W251	156251
	2	W252	156252
Obsolete when stock is depleted			

UNIVERSAL TRAP - SOLID BASE, P Type EJ x Female Thread



1-1/2	L501	257521
1-1/2	L5011	257522

UNIVERSAL TRAP – CLEAR BASE, P Type EJ x Female Thread



1-1/2	L511	257531
1-1/2	L5111	257532

^{*}Pregrooved for Labline. Nut and Olive are extra.

	Dimension inches	Significant Number	Product Code
UNIVERSAL TRAP — SOLID	BASE, S Type	e EJ	
	1-1/2	L5015	257523

UNIVERSAL TRAP - CLEAR BASE, S Type EJ



1-1/2 L5115 257533

FABRICATED EXPANSION JOINT



3	L803	257107
4	L804	257108
6	L806	257109

ENFUSION CONTROL UNIT – Complete Kit



Kit includes hub clamps, 1 1/2" thru 6", connector cable & 5' link cable.

EHHL2600

257279

ENFUSION HUB CLAMP – New T Bar Handle & Bushing



1-1/2	L26101	257254
2	L26102	257256
3	L26103	257257
4	L26104	257258
6	L26106	257259
8	L26108	257260
10	L261010	257255
12	L261212	257262


	Dimension inches	Significant Number	Product Code
STAINLESS STEEL T HAND	LE FOR HUB C	LAMPS	
	1-1/2 to 12	L2610T	257125

OIL IMPREGNATED BRASS BUSHINGS FOR CLAMPS




1-1/2 to 12 L2610B 257094

CONNECTOR CABLE - Current Style Machine



- L26801 257278

CONNECTOR CABLE - Old Style Machine



- L26201 257263

CONNECTOR CABLE – EZ Connector Cable



- L26901 257294

LINK CABLE c/w EZ CONNECTOR



2 ft. EZ	L26260	257268
5 ft. EZ	L26261	257269
10 ft. EZ	L26262	257270
15 ft. EZ	L26263	257271

LINK CABLE c/w LINK LEAD

5 ft.	L26251	257265
10 ft.	L26252	257266
15 ft.	L26253	257267

FUSES

16 AMP	P52690	257801
100 MILAMP	L26501	257276
100 MILAMP	L26502	257277

LABLINE® MECHANICAL JOINT ACID WASTE SYSTEMS

LABLINE®

Labline® (Mechanical Joint) has displaced the more expensive and difficult to install glass and metal systems. Gone is the need for fusing, caulking or welding of joints. Joining of the Labline System is complete in just 30 seconds and once the nut is locked into place, the end-user is assured of many years of trouble-free service. Yet, because it is a mechanical joint, the system can be easily dismantled and re-used, making it ideal for modular designs and for systems that may require re-modeling in the future.

Both Labline® and Plenumline™ contain no-heat Elastolives™ for quick installation and high performance.

ADVANTAGES

30 SECOND JOINTING - save on installation time

PROVEN RELIABILITY for over 30 years

LABLINE IS MANUFACTURED FROM

POLYPROPYLENE which has an operating temperature range from -10°F to 212°F.* This allows systems to be flushed with boiling water

ALL PLASTIC CONSTRUCTION – no galvanic action, electrolysis or corrosion in the joint

SIMPLE, INEXPENSIVE, NON-TEMPERAMENTAL TOOLS

EASY TO INSTALL, even in difficult areas

MASTERED BY PLUMBERS IN MINUTES. No pre-heating required to install olive

SYSTEM CHANGES DURING INSTALLATION CAN BE DONE WITHOUT SPOILING FITTINGS


CAN BE DISASSEMBLED AND RE-USED

IDEAL FOR MODULAR SYSTEMS

IDEAL FOR REMODELING

MATCHED SYSTEM – high quality pipe and fittings are matched to give ease of installation and long term reliability



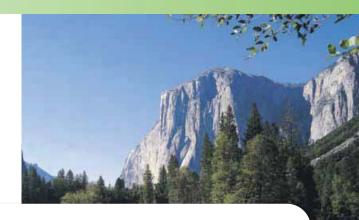

SHORT FORM SPECIFICATIONS

GENERAL

Acid waste drain and vent system, as shown on drawings, shall be NSF listed, Schedule 40, polypropylene as manufactured by IPEX to include pipe supplied in 10 ft. lengths (or 20 ft lengths if NFRPP is specified), and matched fittings, traps and neutralization tanks from the same manufacturer. It shall also include recommended adapters to connect to other piping materials, where applicable.

MATERIAL

Pipe shall be made from NSF listed Type 110 or 210, flame retardant polypropylene conforming to ASTM D4101, with a maximum average flame spread of zero seconds and a maximum extent of burning of 13 mm, in accordance with ASTM D635. Matched fittings shall be made from NSF listed flame retardant polypropylene with average maximum burn time of 80 seconds and maximum extent of burning of 20 mm in accordance with ASTM D635.

If NFRPP pipe is specified, it shall be made from NSF 14 listed and CSA certified Schedule 40 PP as manufactured by IPEX. Pipe shall comply with ASTM F1412 and material used shall comply with the material requirements of ASTM D4101.

FITTINGS

Fittings shall be NSF listed, be of all plastic construction and be designed to lock into a machined groove on the mating piping. All fittings shall have integrally molded union connections. No metallic grab rings or clamps shall be allowed. Fittings containing EVA (ethylene vinyl acetate) are strictly prohibited. Couplings shall not be added to make mechanical joint fittings. Fittings shall be Labline or approved equivalent.

JOINTS

Connections between polypropylene pipe and matched fittings shall be made using the Labline Joint.

INSTALLATION AND TESTING

Installation and testing shall be in accordance with the contract drawings, the manufacturer's recommendations and the local plumbing codes. Testing with compressed air is prohibited. The entire system shall be installed free of stress and in proper alignment. Horizontal supports shall provide a wide bearing area and be free of burrs or sharp edges. Support spacings shall be in accordance with the manufacturer's recommendations and local plumbing codes. Vertical piping shall have riser clamps at each floor. Pipe supports shall be installed so that horizontal piping is in uniform alignment and with a uniform slope of at least 1/8" per foot, or in accordance with the local plumbing codes.



LABLINE® MECHANICAL JOINT ACID WASTE SYSTEMS

PRODUCT SELECTION CHART

	Dimension inches	Significant Number	Product Code
COUPLING			
	1-1/2	W161	156161
	2	W162	156162
	3	W163	156163
	4	W164	156164
- 4			
1/8 BFND (4.5°)			

		REDU
	156161	
	156162	
3	156163	
	156164	

	Dimension inches	Significant Number	Product Code	
REDUCING SANITARY TEE				
	2 x 1-1/2	W2021	156204	
	inches Number	W2031	156207	
	3 x 2	W2032	156208	
	7 TEE 2 x 1-1/2 3 x 1-1/2 3 x 2 4 x 1-1/2 4 x 2	W2041	156211	
	4 x 2	W2042	156212	
	4 x 3	W2043	156213	
CLEANOUT TEE				

1/8 BEND (45°)			
	1-1/2	W191	156191
	2	W192	156192
	3	W193	156193
	4	W194	156194
LOOSE NUT 1/8 BEND (45°) MJ x LN			
	1-1/2	W211	156216

IOUI IEE			
	1-1/2	W2015	156202
	2	W2025	156205
	3	W2035	156209
	4	W2045	156214



1-1/2	W211	156216
2	W212	156217
3	W213	156218
4	W214	156219

45° WYE			
	1-1/2	W371	156361
	2	W372	156363
	3	W373	156367
	4	W374	156373



1-1/2	W181	156181
2	W182	156182
3	W183	156183
4	W184	156184

	2	W372	156363
	3	W373	156367
	4	W374	156373

LOOSE NUT 1/4 BEND MJ x LN

,			
	1-1/2	W291	156291
	2	W292	156292
	3	W293	156293
	4	W294	156294

REDUCING 45° WYE			
	2 x 1-1/2	W3721	156364
	3 x 1-1/2	W3731	156368
	3 x 2	W3732	156369
	4 x 1-1/2	W3741	156374
	4 x 2	W3742	156375
	4 x 3	W3743	156376

SANITARY TEE



1-1/2	W201	156201
2	W202	156203
3	W203	156206
4	W204	156210

COMBINATION WYE & 1/8 BEND



1-1/2	W3715	156362
2	W3725	156365
3	W3735	156370
4	W3745	156377

Dimension inches	Significant Number	Product Code
------------------	-----------------------	-----------------

REDUCING COMBINATION WYE & 1/8 BEND



= , -		
2 x 1-1/2	W37251	156366
3 x 1-1/2	W37351	156371
3 x 2	W37352	156372
4 x 1-1/2	W37451	156380
4 x 2	W37452	156378
4 x 3	W37453	156379

REDUCING COUPLING LN x MJ



. 1	N X IVIJ			
	2 x 1-1/2	W3921	156397	
	3 x 1-1/2	W3931*	156398	
	3 x 2	W3932*	156400	
	4 x 1-1/2	W3941*	156399	
	4 x 2	W3942*	156401	
	4 x 3	W3943	156402	

Significant

Number

Product

Code

* Loose nut not furnished

Dimension

inches

DOUBLE WYE



1-1/2	W381	156381
2	W382	156383
3	W383	156387
4	W384	156392

THREADED ADAPTER Male Thread x Female Thread



1-1/2 x 1-1/4	W121	156121
1-1/2 x 1-1/2	W131	156131

REDUCING DOUBLE WYE



2 x 1-1/2	W3821	156384
3 x 1-1/2	W3831	156388
3 x 2	W3832	156389
4 x 1-1/2	W3841	156405
4 x 2	W3842	156393
4 x 3	W3843	156394

MALE ADAPTER MJ x Male Thread



1-1/2	W1411	156141
2	W142	156142
3	W143	156143
4	W144	156144

DOUBLE WYE & 1/8 BEND



1-1/2	W3815	156382
2	W3825	156385
3	W3835	156390
4	W3845	156395

FEMALE ADAPTER MJ x Female Thread



1-1/2	W151	156151
2	W152	156152

REDUCING DOUBLE WYE & 1/8 BEND



2 x 1-1/2	W38251	156386
3 x 1-1/2	W38351	156406
3 x 2	W38352	156391
4 x 1-1/2	W38451	156407
4 x 2	W38452	156396
4 x 3	W38453	156408

GLASS ADAPTER MJ x Bead



1-1/2	W451	156451
2	W452	156452
3	W453	156453
4	W454	156454

CAST IRON ADAPTER MJ x Spigot



1-1/2	W461	156461
2	W462	156462
3	W463	156463
4	W464	156464

LABLINE® MECHANICAL JOINT ACID WASTE SYSTEMS

PRODUCT SELECTION CHART

	Dimension inches	Significant Number	Product Code
CLEANOUT PLUG			
	1-1/2	W241	156241
	2	W242	156242
	3	W243	156243
	4	W244	156244

VENT LOOP U BEND



1-1/2	W1011	156101
2	W1012	156102

PTRAP - 2 PIECE



1-1/2	W1021	156103
2	W1022	156104

PTRAP - 3 PIECE LONG RADIUS



1-1/2	WT11	156711
2	WT12	156712
3	WT13	156713
4	WT14	156714

STRAP - 3 PIECE



1-1/2	W1031	156105
2	W1032	156106

RUNNING TRAP – 3 PIECE



1-1/2	W1041	156107
2	W1042	156108

	Dimension inches	Significant Number	Product Code
UNIVERSAL TRAP FEMALE	Thread x MJ		
	1-1/2	W501	156501
	1-1/2	W511	156511
	Transparent	Base	
	_	W5112	156512
	PP Base On	ıly	
	-	W5113	156513
	Clear Base	Only	
	-	W5114	156514
	O-ring Gask	et Only	
	-	W5116	156516
	Top Assemb	oly For W501 &	W511

UNIVERSAL TRAP, S-TYPE FEMALE Thread x MJ



1-1/2	W5015	156502
*1-1/2	W5115	156515

^{*} Transparent Base

SINK OUTLET w/ PLUG



1-1/2 - 3-3/8	W301B (Black)	156303
1-1/2 - 3-3/8	W301W (White)	156304
1-1/2 - 2-7/8	W311B (Black)	156311
1-1/2 - 2-7/8	W311W (White)	156312
_	W3012B	156302

(Lock Nut For W301B) Specify Black or White

SINK OUTLET PLUG

W3011B (Black)	156301
W3011W (White)	156305

SINK OVERFLOW

1-1/2	W321B (Black)	156321
1-1/2	W321W (White)	156322


	Dimension inches	Significant Number	Product Code
CUP SINK ROUND			
	6 x 4 Deep	W401B	156403
	4 x 4 Deep	W402	156404
F	-	W4011B	156409
	(Plug for W401B)

	Dimension inches	Significant Number	Product Code
UNION NUT			
	1-1/2	W231	156231
	2	W232	156232
	3	W233	156233
	4	W234	156234

CUP SINK OVAL

6 x 3	W497	156491
9 x 3	W498	156493
-	W4971	156492
	(Nut for W497)	

NO HEAT ELASTOLIVE YELLOW



GROOVING TOOL & SPANNER COMBINATION SET

DILUTION TRAP



1-1/2	W601	156601
* 1-1/2	W611	156611

^{*} Transparent Base

GROOVING TOOL



1-1/2	W261	156109
2	W262	156110
3	W263	156111
4	W264	156112

156222

156113

156114

156115

COBRA PIPE CLIP



1-1/2	434310	437345
2	434311	437346
2-1/2	434312	437347
3	434313	437348
4	434314	437349
6	434317	437332

SPANNER



1-1/2	W2611	156264
2	W2622	156266
3	W2633	156268
4	W2644	156270

3 /3/313 /373/8



1-1/2	W261CS	156263
2	W262CS	156265
3	W263CS	156267
4	W264CS	156269

PIPE CLIP



1-1/2	W251	156251
2	W252	156252

Obsolete when stock is depleted

MECHANICAL JOINT LUBRICANT



1kg – 156715

PLENUMLINETM MECHANICAL JOINT ACID WASTE SYSTEMS

PLENUMLINE

Plenumline mechanical joint acid waste systems easily displace costly and difficult-to-install glass and metal systems. With Plenumline, time-consuming methods associated with conventional heavy and brittle systems are replaced by a time proven mechanical joint that takes only 30 seconds to complete. Once the Plenumline nut is locked in place, the end-user is assured of many years of trouble-free service. In addition, mechanical joint systems can easily be dismantled and re-used, making Plenumline ideal for modular designs and future expansions.

IPEX Plenumline is a robust acid waste system, made from flame-retardant PVDF thermoplastic, designed for challenging conditions, including highly restrictive return air plenum applications and high-temperature corrosive chemical waste situations.

ADVANTAGES

IDEALLY SUITED TO PLENUM APPLICATIONS

30-SECOND JOINTS SHORTEN INSTALLATION TIME

MANUFACTURED FROM FLAME RETARDANT PVDF, which has an operating temperature range from -40°F (-40°C) to 285°F (140°C). With this high upper limit, Plenumline systems can be flushed with boiling water.

ALL-PLASTIC CONSTRUCTION ELIMINATES GALVANIC ACTION, ELECTROLYSIS AND CORROSION IN THE JOINT.

EASY TO INSTALL, even in tight areas, by using simple, inexpensive tools. Mechanical joints are mastered by plumbers in minutes; no pre-heating is required to install the new blue elastolive.

MODULARIZED DESIGN means Plenumline components can be disassembled and re-used. In addition, system modifications during installation can be performed without damaging fittings.

HIGH-QUALITY PIPE AND FITTINGS are matched to simplify installation and extend long-term reliability.





SHORT FORM SPECIFICATIONS

GENERAL

Acid waste drain and vent system, as shown on drawings, shall be IAPMO listed, Schedule 40, FR-PVDF as manufactured by IPEX to include pipe supplied in 10 ft. lengths and matched fittings, traps and neutralization tanks from the same manufacturer. It shall also include recommended adapters to connect to other piping materials, where applicable.

MATERIAL

Pipe and fittings shall be made from Kynar 740-02, flame retardant PVDF conforming to ASTM F 1673, with a limiting oxygen index (LOI) of 60, Resin must have a vertical burn rating of 94 V-0. Kynar 740-02 resin based on testing to ASTM E84 (UL 723) must have surface burning characteristics greater than or equal to a flame spread 5 and smoke development 35.

FITTINGS

Fittings shall be third party certified to ASTM F 1673 and ASTM E84, and IAPMO approved, be of all plastic construction and a tapered elastic retaining ring shall be designed to lock into a machined groove on the mating piping. All fittings shall have integrally molded union connections. No metallic grab rings or clamps shall be allowed. Fittings shall be Plenumline™ or approved equal.

INSTALLATION AND TESTING

Installation and testing shall be in accordance with the contract drawings, the manufacturer's recommendations and the local plumbing codes. Testing with compressed air including air booster over water is prohibited. The entire system shall be installed free of stress and in proper alignment. Horizontal supports shall provide a wide bearing area and be free of burrs or sharp edges. Support spacings shall be in accordance with the manufacturer's recommendations and local plumbing codes. Vertical piping shall have riser clamps at each floor. Pipe supports shall be installed so that horizontal piping is in uniform alignment and with a uniform slope of at least 1/8" per foot, or in accordance with the local plumbing code requirements.



PLENUMLINETM MECHANICAL JOINT ACID WASTE SYSTEMS

PRODUCT SELECTION CHART

	Dimension inches	Significant Number	Product Code		Dimension inches	
PIPE				LOOSE NUT 1/4 BEND L	LOOSE NUT 1/4 BEND LN x MJ	LOOSE NUT 1/4 BEND LN x MJ
	1-1/2	W001P	147045		1-1/2	
	2	W002P	147046		2	
	3	W003P	147047		3	3 W293P
	4	W004P	147048		4	└ ☐ 4 W294P
COUPLING				SANITARY TEE	SANITARY TEE	SANITARY TEF
COOLUNO	1-1/2	W161P	157006	OAINIAKI IEE	1-1/2	
	2	W162P	157007		2	₩ <u>~~</u> LLU
	3	W163P	157008		3	
	4	W164P	157009		4	4 W204P
1/8 BEND				reducing sanitary tee	reducing sanitary tee	REDUCING SANITARY TEE
I/O BEIND	1-1/2	W191P	157014		2 x 1-1/2	2 x 1-1/2 W2021P
	2	W192P	157015		3 x 1/12	3 x 1/12 W2031P
	3	W193P	157016		3 x 2	3 x 2 W2032P
	4	W194P	157017		4 x 2	4 x 2 W2042P
					4 x 3	4 x 3 W2043P
LOOSE NUT 1/8 BEND						
	1-1/2	W211P	157024	CLEANOUT TEE		
	2	W212P	157025		1-1/2	
	3	W213P	157026		2	
	4	W214P	157027		3	- \ _
					4	4 W2045P
1/4 BEND						
- Fin	1-1/2	W181P	157010	45° WYE	45° WYE	45° WYE
	2	W182P	157011		1-1/2	1-1/2 W371P
	3	W183P	157012		2	2 W372P
	4	W/104D	157010			2 W272B

3

W373P

W374P

157038

157039

157013

W184P

	Dimension inches	Significant Number	Product Code
REDUCING 45° WYE			
	2 x 1-1/2	W3721P	157069
	3 x 1/12	W3731P	157073
	3 x 2	W3732P	157070
	4 x 2	W3742P	157071
	4 x 3	W3743P	157072

	Dimension inches	Significant Number	Product Code
DOUBLE WYE & 1/8 BEN	ĮD		
	1-1/2	W3815P	157100
	2	W3825P	157101
	3	W3835P	157102
	4	W3845P	157103

	4 x 2	W3/42P	15/0/1	
	4 x 3	W3743P	157072	
COMBINATION WYE & 1,	/8 BEND			
	1-1/2	W3715P	157074	
	2	W3725P	157075	
	3	W3735P	157076	
	4	W3745P	157077	
REDUCING COMBINATION WYE & 1/8 BEND				
	2 x 1-1/2	W37251P	157078	
	3 x 1/12	W37351P	157079	

	1-1/2	W3815P	15/100
	2	W3825P	157101
	3	W3835P	157102
	4	W3845P	157103
MALE ADAPTER MJ x Mal	e Thread		
	1-1/2	W141P	157002
	2	W142P	157003
female adapter MJ x F	emale Thread		
	1-1/2	W151P	157004
	2	W152P	157005
CLEANOUT PLUG			
	1-1/2	W241P	157028
	2	W242P	157029
	3	W243P	157030
	4	W244P	157031
L DENID (D TD A D			

<u></u>	4 x 3	W37453P	157082	
DOUBLE 45° WYE (Fabricated)				
	1-1/2	W381P	157049	
	2	W382P	157050	
	3	W383P	157051	

3 x 2

4 x 2

W37352P

W37452P

W384P

157080

157081

157052

1-1/2	W1011P	157000
2	W1012P	157001
	1-1/2	1 1/2

REDUCING DOUBLE WYE			
	2 x 1-1/2	W3821P	157096
	3 x 1/12	W3831P	157104
	3 x 2	W3832P	157097
	4 x 1-1/2	W38841P	157091
<u>, </u>	4 x 2	W3842P	157098
	4 x 3	W3843P	157099

P-TRAP 2 PIECE			
	1-1/2	W1021P	157083
	2	W1022P	157084
MECHANICAL JOINT LUBI	DIC ANIT		
WECHANICAL JOINT LUBI	RICANI		
	1kg	-	156715

PLENUMLINETM MECHANICAL JOINT ACID WASTE SYSTEMS

PRODUCT SELECTION CHART

imension inches

P-TRAP LONG RADIUS 3 PIECE



1-1/2	WT11P	157085
2	WT12P	157086
3	WT13P	157087
4	WT14P	157088

RUNNING TRAP



1-1/2	W1041P	157089
2	W1042P	157090

TAIL PIECE ADAPTER Sp x Brass Compression Ring 1-1/2 x 12 W3012P 157105

NO HEAT ELASTOLIVE BLUE



1-1/2	W221NHP	157066
2	W222NHP	157106
3	W223NHP	157107
4	W224NHP	157108

Note: Blue olive nut is not interchangeable with the FRPP Yellow olive nut.

FABRICATED CAP



1-1/2	W641P	157053
2	W642P	157054
3	W643P	157055
4	W644P	157056

UNION NUT



1-1/2	W231P	157109
2	W232P	157110
3	W233P	157111
4	W234P	157112

LOOSE NUT - REDUCING COUPLING LN x MJ



2 x 1-1/2	W3921P	157040
3 x 1/12	W3931P	157041
3 x 2	W3932P	157042
4 x 2	W3942P	157043
4 x 3	W3943P	157044

Note: Loose Nut and Olive not furnished.

GROOVING TOOL & SPANNER COMBINATION SET



1-1/2	W261CS	156263
2	W262CS	156265
3	W263CS	156267
4	W264CS	156269

FLANGES (Fabricated)



1-1/2	W361P	157057
2	W362P	157058
*3	W363P	157059
4	W364P	157060

*While quantities last, Obsolete when stock depleted

SPANNER



1-1/2	W2611	156264
2	W2622	156266
3	W2633	156268
4	W2644	156270

GROOVING TOOL



1-1/2	W261	156109
2	W262	156110
3	W263	156111
4	W264	156112

FLOWAYTM POLYPROPYLENE FLOOR DRAINS

POLYPROPYLENE FLOOR DRAINS

For efficiently managing chemical spills, our FlowayTM adjustable and non-adjustable polypropylene drain ports are specially designed to feed into IPEX acid waste systems.

ADVANTAGES

RATED FOR PEDESTRIAN TRAFFIC AND AVAILABLE IN SIZES FROM 2" TO 6".

FLOWAY™ DRAINS CAN BE OPTIONALLY CONFIGURED WITH ADJUSTABLE STRAINERS, ROUND FUNNELS, SEDIMENT BASKETS AND PLAIN END OR THREADED OUTLETS.

ADJUSTABLE FEATURE ALLOWS EASY LEVELING AFTER POURING OF FINISHED FLOORS




FLOWAYTM POLYPROPYLENE FLOOR DRAINS

PRODUCT SELECTION CHART

	Dimension inches	Significant Number	Product Code	
F1000 SERIES ADJUSTABLI	F1000 SERIES ADJUSTABLE FLOOR DRAIN			
	Enfield 2	F1201L	237001	
	Labline 2	F1201W	237075	
	3	F1301P	237011	
	4	F1401P	237021	
	6	F1601P	237031	


	Dimension inches	Significant Number	Product Code
F4000 SERIES NON-ADJUSTABLE FLOOR DRAIN			
	Enfield 2	F4201L	237041
	Labline 2	F4201W	237079
	3	F4301P	237051
	4	F4401P	237061
	6	F4601P	237071

F1000 SERIES ADJUSTABLE FLOOR DRAIN



w/ Sediment Basket

F4000 SERIES NON-ADJUSTABLE FLOOR DRAIN



F1000 SERIES ADJUSTABLE FLOOR DRAIN



Enfield 2	F1203L	237003
Labline 2	F1203W	237077
3	F1303P	237013
4	F1403P	237023
6	F1603P	237034

w/ Sediment Basket and 6" Round Funnel

F4000 SERIES NON-ADJUSTABLE FLOOR DRAIN



Enfield 2	F4203L	237044
Labline 2	F4203W	237081
3	F4303P	237053
4	F4403P	237063
6	F4603P	237073

w/ Sediment Basket & 6" Round Funnel

F1000 SERIES ADJUSTABLE FLOOR DRAIN



Enfield 2	F1204L	237004
Labline 2	F1204W	237078
3	F1304P	237014
4	F1404P	237024
6	F1604P	237032

w/ 6" Round Funnel Only

F4000 SERIES NON-ADJUSTABLE FLOOR DRAIN



Enfield 2	F4204L	237043
Labline 2	F4204W	237082
3	F4304P	237054
4	F4404P	237064
6	F4604P	237074

w/ 6" Round Funnel Only

	Dimension inches	Significant Number	Product Code		Dimension inches	Significant Number
LOOR CLEANOUT WITH	H BRASS COVER	(adjustable Cl	eanout) SP	SEDIMENT BASKET STRA	iner for f Seri	ES DRAINS
	2	F2COB	237173		F1000 Series	P20016
	3	F3C0B	237174		F4000 Series	P20015
	4	F4COB	237175			
	6	F6COB	237177			
				GRID STRAINERS FOR F S	SERIES DRAINS	
					F1000 Series	P20013
GAS TIGHT PLUG					F4000 Series	P20011
	3	P20036	237815			
	4	P20037	237816			
	6	P20038	237817	MALE IRON PIPE THREA	DED OUTLET	
					3	-
					4	-
ALLENHEAD VANDALPRO						
	Set of 3 screv	vs P20035	237045			
				FPT TAP FOR PRIMING DE	RAIN ASSEMBLY	
					3/8	-
BLANK COVER FOR F SE					1/2	-
	F1000 Series	P20034	237814			
	F4000 Series	P20033	237813			
OUND FUNNEL						

HDPE & POLYPROPYLENE NEUTRALIZATION TANKS

NEUTRATANK®

IPEX offers a complete range of Neutratank® neutralization tanks as well as dilution, sampling and pH tanks for managing concentrations and pH levels in acid waste systems.

Neutratanks are made of high-density polyethylene or polypropylene material with a one-piece rotationally molded, seamless construction, a bolt-down flanged top and combination access cover. Neutratanks are available in sizes from 5 gallons to 2,000 gallons to suit most potential design conditions.

i

Neutratanks are used for limestone neutralization of chemical waste prior to discharge into the sewer.

ADVANTAGES

CYLINDRICAL AND RECTANGULAR LIMESTONE NEUTRALIZATION TANKS FROM 5 TO 2000 GALLONS ARE AVAILABLE.

A VARIETY OF LIDS, INLETS, OUTLETS AND ACCESSORIES ARE OFFERED.

DILUTION TANKS ARE AVAILABLE IN 1, 2 AND 5-GALLON SIZES.

SHORT FORM SPECIFICATIONS

Contractor shall furnish and install HDPE or Polypropylene Neutralization Tank. Tank shall be rotationally molded, seamless construction with flanged top and welded or bolt down cover, as supplied by IPEX. Tank shall be Neutratank, having 100-gallon capacity complete with 3" inlet and outlet, and 1-1/2" vent connection. Tank to be 32" diameter x 42" high. Tank shall be installed in accordance with manufacturer's recommendations.

Contractor shall furnish and fill the tank prior to installation with limestone chips, as supplied by IPEX, to a level just below the tank outlet. Water should be added to the tank prior to placement of the limestone chips.



	Gallons	Inlet/Outlet inches	Significant Number	Product Code		Gallons	Inlet/Outlet inches	Significant Number	Produc Code
HDPE EZ Pla	in End				HDPE HD BOLT	ED FLAT Plain	End		
	5	1-1/2	EZ0005A	237111		5	1-1/2	HDF005A	23718
	5	2	EZ0005B	237112		5	2	HDF005B	23718
	15	2	EZ0015B	237122		15	2	HDF015A	23718
	15	3	EZ0015C	237123		15	3	HDF015B	23718
	30	2	EZ0030B	237132		30	2	HDF030A	23718
	30	3	EZ0030D	237133		30	3	HDF030B	23718
	30	4	EZ0030C	237133		30	4	HDF030C	23718
						55	3	HDF055A	23719
	55	3	EZ0055C	237143		55	4	HDF055B	23719
	55	4	EZ0055D	237144		100	3	HDF100A	23719
	100	3	EZ0100C	237152		100	4	HDF100B	23719
	100	4	EZ0100D	237153		150	3	HDF150A	23719
	150	3	EZ0150C	237241		150	4	HDF150B	23719
	150	4	EZ0150D	237242		200	3	HDF200A	23719
	200	3	EZ0200C	237271		200	4	HDF200B	23719
	200	4	EZ0200D	237272		275	3	HDF275A	23719
	275	3	EZ0200D	237128		275 360	4 3	HDF275B	23719
						360	4	HDF360A HDF360B	23720
	275	4	EZ0275D	237129		360	6	HDF360C	23720
			Laka d			300			23720
	*Obsolete wh	en stock is dep	петеа			500	3	HIJERUUM	
	*Obsolete wh	en stock is dep	петеа			500 500	3	HDF500A	
DPE STANDA		·	iletea			500	4	HDF500B	23720
DPE STANDA	ARD DOMED F	·		237211					23720 23720 23720
DPE STANDA	ARD DOMED F	Plain End	T0005A	237211		500	4	HDF500B	23720
DPE STAND/	ARD DOMED F 5 5	Plain End 1-1/2 2	T0005A T0005B	237212	HDPE STEEL PE	500 500	4 6	HDF500B	23720
OPE STANDA	ARD DOMED F 5 5 15	Plain End 1-1/2 2 2	T0005A T0005B T0015B	237212 237222	HDPE STEEL PE	500 500	4 6	HDF500B	23720 23720
dpe stand/	5 5 5 15 15	Plain End 1-1/2 2 2 3	T0005A T0005B T0015B T0015C	237212 237222 237223	HDPE STEEL PE	500 500 DESTRIAN PIA	4 6 ain End	HDF500B HDF500C	23720 23720 23750
dpe stand?	5 5 5 15 15 30	Plain End 1-1/2 2 2 3 2	T0005A T0005B T0015B T0015C T0030B	237212 237222 237223 237232	HDPE STEEL PE	500 500 DESTRIAN PIE	4 6 ain End	HDF500B HDF500C	23720 23720 23750 23750
DPE STANDA	5 5 15 15 30 30	Plain End 1-1/2 2 2 3 2 3	T0005A T0005B T0015B T0015C T0030B T0030C	237212 237222 237223 237232 237233	HDPE STEEL PE	500 500 DESTRIAN Pla 5 5	4 6 ain End 1-1/2 2	HDF500B HDF500C SP005A SP005B	23720 23720 23750 23750 23750
DPE STANDA	5 5 15 15 30 30	Plain End 1-1/2 2 2 3 2 3 4	T0005A T0005B T0015B T0015C T0030B T0030C T0030D	237212 237222 237223 237232 237233 237234	HDPE STEEL PE	500 500 DESTRIAN Pla 5 5 15	4 6 ain End 1-1/2 2 2	HDF500B HDF500C SP005A SP005B SP015A	23720 23720 23750 23750 23750 23750
DPE STANDA	5 5 15 15 30 30 30 55	Plain End 1-1/2 2 2 3 2 3	T0005A T0005B T0015B T0015C T0030B T0030C T0030D T0055C	237212 237222 237223 237232 237233 237234 237243	HDPE STEEL PE	500 500 DESTRIAN Pla 5 5 15	4 6 ain End 1-1/2 2 2 3	HDF500B HDF500C SP005A SP005B SP015A SP015B	23720 23720 23750 23750 23750 23750 23750
DPE STANDA	5 5 15 15 30 30	Plain End 1-1/2 2 2 3 2 3 4	T0005A T0005B T0015B T0015C T0030B T0030C T0030D	237212 237222 237223 237232 237233 237234	HDPE STEEL PE	500 500 DESTRIAN Pla 5 5 15 15 30 30 30	4 6 ain End 1-1/2 2 2 3 2 3 2	SP005A SP005B SP015A SP015B SP030A SP030B SP030C	23720 23720 23750 23750 23750 23750 23750 23750 23750
DPE STAND/	5 5 15 15 30 30 30 55	Plain End 1-1/2 2 2 3 2 3 4 3	T0005A T0005B T0015B T0015C T0030B T0030C T0030D T0055C	237212 237222 237223 237232 237233 237234 237243	HDPE STEEL PE	500 500 DESTRIAN Pla 5 5 15 15 30 30 30 55	4 6 ain End 1-1/2 2 2 3 2 3 4 3	SP005A SP005B SP015A SP015B SP030A SP030B SP030C SP055A	23720 23720 23750 23750 23750 23750 23750 23750 23750 23750
DPE STANDA	5 5 15 15 30 30 30 55 55	Plain End 1-1/2 2 2 3 2 3 4 3 4	T0005A T0005B T0015B T0015C T0030B T0030C T0030D T0055C T0055D	237212 237222 237223 237232 237233 237234 237244 237244	HDPE STEEL PE	500 500 500 DESTRIAN Pla 5 5 15 15 30 30 30 55 55	4 6 ain End 1-1/2 2 2 3 2 3 4 3 4	SP005A SP005B SP015A SP015B SP030A SP030B SP030C SP055A SP055B	23720 23720 23750 23750 23750 23750 23750 23750 23750 23750 23750
DPE STAND/	5 5 15 15 30 30 30 55 55 100	Plain End 1-1/2 2 2 3 2 3 4 3 4 3	T0005A T0005B T0015B T0015C T0030B T0030C T0030D T0055C T0055D T0100C T0100D	237212 237222 237223 237232 237233 237234 237243 237244 237252 237253	HDPE STEEL PE	500 500 500 500 5 5 15 15 30 30 30 55 55 100	4 6 ain End 1-1/2 2 2 3 2 3 4 3 4 3	SP005A SP005B SP015A SP015B SP030A SP030B SP030C SP055A SP055B SP100A	23720 23720 23720 23750 23750 23750 23750 23750 23750 23750 23750 23750 23750
DPE STAND#	5 5 15 15 30 30 30 55 55 100 100	Plain End 1-1/2 2 2 3 2 3 4 3 4 3 4 3	T0005A T0005B T0015B T0015C T0030B T0030C T0030D T0055C T0055D T0100C T0100D T0150C	237212 237222 237223 237232 237233 237234 237243 237244 237252 237253 237281	HDPE STEEL PE	500 500 500 500 5 5 15 15 15 30 30 30 55 55 100 100	4 6 ain End 1-1/2 2 2 3 2 3 4 3 4 3 4	SP005A SP005B SP015A SP015B SP030A SP030B SP030C SP055A SP055B SP100A SP100B	23720 23720 23720 23750 23750 23750 23750 23750 23750 23750 23750 23750 23750 23750 23750 23750
DPE STANDA	5 5 15 15 30 30 30 55 55 100 100 150	Plain End 1-1/2 2 2 3 2 3 4 3 4 3 4 3 4	T0005A T0005B T0015B T0015C T0030B T0030C T0030D T0055C T0055D T0100C T0100D T0150C T0150D	237212 237222 237223 237232 237233 237234 237243 237244 237252 237253 237281 237282	HDPE STEEL PE	500 500 500 500 5 5 15 15 30 30 30 55 55 100 100 150	4 6 ain End 1-1/2 2 2 3 2 3 4 3 4 3 4 3	SP005A SP005B SP015A SP015B SP030A SP030B SP030C SP055A SP055B SP100A SP100B SP150A	23720 23720 23720 23750 23750 23750 23750 23750 23750 23750 23750 23750 23750 23750 23750 23750 23750 23750
DPE STANDA	5 5 15 15 30 30 30 55 55 100 100 150 150 200	Plain End 1-1/2 2 2 3 2 3 4 3 4 3 4 3 4 3	T0005A T0005B T0015B T0015C T0030B T0030C T0030D T0055C T0055D T0100C T0100D T0150C T0150D T0200C	237212 237222 237223 237232 237233 237234 237243 237244 237252 237253 237281 237282 237411	HDPE STEEL PE	500 500 500 500 5 5 15 15 30 30 30 55 55 100 100 150	4 6 ain End 1-1/2 2 2 3 2 3 4 3 4 3 4 3 4	SP005A SP005B SP015A SP015B SP030A SP030B SP030C SP055A SP055B SP100A SP100B SP150A SP150B	23720 23720 23720 23750 23750 23750 23750 23750 23750 2375 2375 2375 2375 2375 2375 2375
DPE STAND/	5 5 15 15 30 30 30 55 55 100 100 150 200 200	Plain End 1-1/2 2 2 3 2 3 4 3 4 3 4 3 4 3 4	T0005A T0005B T0015B T0015C T0030B T0030C T0030D T0055C T0055D T0100C T0100D T0150C T0150D T0200C T0200D	237212 237222 237223 237232 237233 237234 237244 237252 237253 237281 237282 237411 237412	HDPE STEEL PE	500 500 500 DESTRIAN Pla 5 5 15 15 30 30 30 55 55 100 100 150 150 200	4 6 ain End 1-1/2 2 2 3 2 3 4 3 4 3 4 3 4 3 4 3	SP005A SP005B SP015A SP015B SP030A SP030C SP055A SP055B SP100A SP100B SP150A SP150B SP200A	23720 23720 23720 23750 23750 23750 23750 23750 23750 2375 2375 2375 2375 2375 2375 2375 2375
DPE STANDA	5 5 15 15 30 30 30 55 55 100 100 150 150 200 200 275	Plain End 1-1/2 2 2 3 2 3 4 3 4 3 4 3 4 3 4 3 4 3 4 3	T0005A T0005B T0015B T0015C T0030B T0030C T0030D T0055C T0055D T0100C T0100D T0150C T0150D T0200C T0200D T0275C	237212 237222 237223 237232 237233 237234 237244 237252 237253 237281 237282 237411 237412 237130	HDPE STEEL PE	500 500 500 500 5 5 5 15 15 30 30 30 55 55 100 100 150 200 200	4 6 ain End 1-1/2 2 2 3 2 3 4 3 4 3 4 3 4 3 4 3 4	SP005A SP005B SP015A SP015B SP030A SP030B SP030C SP055A SP055B SP100A SP100B SP150A SP150B SP200A SP200B	2372(2372(2372(2375(2375) 2375(2375(2375(2375) 2375 2375 2375 2375 2375 2375 2375 2375
DPE STANDA	5 5 15 15 30 30 30 55 55 100 100 150 200 200 275 275	Plain End 1-1/2 2 2 3 2 3 4 3 4 3 4 3 4 3 4	T0005A T0005B T0015B T0015C T0030B T0030C T0030D T0055C T0055D T0100C T0100D T0150C T0150D T0200C T0200D T0275C T0275D	237212 237222 237223 237232 237233 237234 237243 237244 237252 237253 237281 237282 237411 237412 237130 237124	HDPE STEEL PE	500 500 500 500 500 55 55 100 100 150 200 200 275	4 6 ain End 1-1/2 2 2 3 4 3 4 3 4 3 4 3 4 3 4 3	SP005A SP005B SP015A SP015B SP030A SP030B SP030C SP055A SP055B SP100A SP100B SP150A SP150B SP200A SP200B SP275A	2372(2372(2372(2375(
DPE STANDA	5 5 15 15 30 30 30 55 55 100 100 150 150 200 200 275	Plain End 1-1/2 2 2 3 2 3 4 3 4 3 4 3 4 3 4 3 4 3 4 3	T0005A T0005B T0015B T0015C T0030B T0030C T0030D T0055C T0055D T0100C T0100D T0150C T0150D T0200C T0200D T0275C	237212 237222 237223 237232 237233 237234 237244 237252 237253 237281 237282 237411 237412 237130	HDPE STEEL PE	500 500 500 500 500 55 55 15 30 30 30 55 55 100 100 150 200 200 275 275	4 6 ain End 1-1/2 2 2 3 2 3 4 3 4 3 4 3 4 3 4 3 4 3 4	SP005A SP005B SP015A SP015B SP030A SP030B SP030C SP055A SP055B SP100A SP150A SP150B SP200A SP200B SP275A SP275B	2372(2372(2372(2375(
DPE STANDA	5 5 15 15 30 30 30 55 55 100 100 150 200 200 275 275	Plain End 1-1/2 2 2 3 2 3 4 3 4 3 4 3 4 3 4 3 4 3 4	T0005A T0005B T0015B T0015C T0030B T0030C T0030D T0055C T0055D T0100C T0100D T0150C T0150D T0200C T0200D T0275C T0275D	237212 237222 237223 237232 237233 237234 237243 237244 237252 237253 237281 237282 237411 237412 237130 237124	HDPE STEEL PE	500 500 500 500 500 55 55 100 100 150 200 200 275 275 360	4 6 ain End 1-1/2 2 2 3 4 3 4 3 4 3 4 3 4 3 4 3 4 3 4 3	SP005A SP005B SP015A SP015B SP030A SP030B SP030C SP055A SP055B SP100A SP150A SP150B SP200A SP200B SP275A SP275B SP360A	2372(2372(2372(2375(
DPE STANDA	5 5 15 15 30 30 30 55 55 100 100 150 150 200 200 275 275 360	Plain End 1-1/2 2 2 3 2 3 4 3 4 3 4 3 4 3 4 3 4 3 4 3	T0005A T0005B T0015B T0015C T0030B T0030C T0030D T0055C T0055D T0100C T0100D T0150C T0150D T0200C T0200D T0275C T0275D T0360C	237212 237222 237223 237232 237233 237234 237243 237244 237252 237253 237281 237282 237411 237412 237130 237124 237125	HDPE STEEL PE	500 500 500 500 500 55 55 15 30 30 30 55 55 100 100 150 200 200 275 275 360 360	4 6 ain End 1-1/2 2 2 3 4 3 4 3 4 3 4 3 4 3 4 3 4	SP005A SP005B SP015A SP015B SP030A SP030B SP030C SP055A SP055B SP100A SP150A SP150A SP200A SP200B SP275A SP275B SP360A SP360B	23720 23720 23750 23750 23750 23750 23750 23750 2375 2375 2375 2375 2375 2375 2375 2375
DPE STANDA	5 5 15 15 30 30 30 55 55 100 100 150 200 200 275 275 360 360 360	Plain End 1-1/2 2 2 3 2 3 4 3 4 3 4 3 4 3 4 3 4 3 4 3 4 6	T0005A T0005B T0015B T0015C T0030B T0030C T0030D T0055C T0055D T0100C T0100D T0150C T0150D T0200C T0200D T0275C T0275D T0360C T0360C T0360D T0360E	237212 237222 237223 237232 237233 237234 237244 237252 237253 237281 237282 237411 237412 237130 237124 237126 237497	HDPE STEEL PE	500 500 500 500 500 55 55 15 30 30 30 55 55 100 100 150 200 200 275 275 360 360 360	4 6 ain End 1-1/2 2 2 3 4 3 4 3 4 3 4 3 4 3 4 3 4 6	SP005A SP005B SP015A SP015B SP015B SP030A SP030B SP030C SP055A SP055B SP100A SP150A SP150B SP200A SP200B SP275A SP275B SP360A SP360B SP360C	23750 23750 23750 23750 23750 23750 23750 23750 2375 2375 2375 2375 2375 2375 2375 2375
IDPE STANDA	5 5 15 15 30 30 30 30 55 55 100 100 150 150 200 200 275 275 360 360 360 500	Plain End 1-1/2 2 2 3 2 3 4 3 4 3 4 3 4 3 4 3 4 3 4 3	T0005A T0005B T0015B T0015C T0030B T0030C T0030D T0055C T0055D T0100C T0100D T0150C T0150D T0200C T0200D T0275C T0275D T0360C T0360D T0360E T0500C	237212 237222 237223 237232 237233 237234 237244 237252 237253 237281 237282 237411 237412 237130 237124 237125 237126 237497 237135	HDPE STEEL PE	500 500 500 500 500 55 55 15 30 30 30 55 55 100 100 150 200 200 275 275 360 360 360 500	4 6 ain End 1-1/2 2 2 3 4 3 4 3 4 3 4 3 4 3 4 3 4 3 4 3	SP005A SP005B SP015A SP015B SP015A SP030A SP030B SP030C SP055A SP055B SP100A SP150A SP150B SP200A SP200B SP275A SP275B SP360A SP360B SP360C SP500A	23750 23750 23750 23750 23750 23750 23750 23750 2375 2375 2375 2375 2375 2375 2375 2375
HDPE STAINDA	5 5 15 15 30 30 30 55 55 100 100 150 200 200 275 275 360 360 360	Plain End 1-1/2 2 2 3 2 3 4 3 4 3 4 3 4 3 4 3 4 3 4 3 4 6	T0005A T0005B T0015B T0015C T0030B T0030C T0030D T0055C T0055D T0100C T0100D T0150C T0150D T0200C T0200D T0275C T0275D T0360C T0360C T0360D T0360E	237212 237222 237223 237232 237233 237234 237244 237252 237253 237281 237282 237411 237412 237130 237124 237126 237497	HDPE STEEL PE	500 500 500 500 500 55 55 15 30 30 30 55 55 100 100 150 200 200 275 275 360 360 360	4 6 ain End 1-1/2 2 2 3 4 3 4 3 4 3 4 3 4 3 4 3 4 6	SP005A SP005B SP015A SP015B SP015B SP030A SP030B SP030C SP055A SP055B SP100A SP150A SP150B SP200A SP200B SP275A SP275B SP360A SP360B SP360C	23720

HDPE & POLYPROPYLENE NEUTRALIZATION TANKS


PRODUCT SELECTION CHART

	Gallons	Inlet/Outlet inches	Significant Number	Product Code		
POLYPRO STANDARD DOMED Plain End						
	7	1-1/2	PPT005A	237059		
7	7	2	PPT005B	237065		
	7 15	2	PPT015A	237066		
	15	3	PPT015B	237067		
	30	2	PPT030A	237068		
	30	3	PPT030B	237069		
	30	4	PPT030C	237070		
	55	3	PPT055A	237093		
	55	4	PPT055B	237094		
	100	3	PPT100A	237095		
	100	4	PPT100B	237096		
	150	3	PPT150A	237097		
	150	4	PPT150B	237098		
	200	3	PPT200A	237099		
	200	4	PPT200B	237100		
	275	3	PPT275A	237101		
	275	4	PPT275B	237102		
	360	3	PPT360A	237103		
	360	4	PPT360B	237104		
	360	6	PPT360C	237105		
	500	3	PPT500A	237106		
	500	4	PPT500B	237107		
	500	6	PPT500C	237108		

	Gallons	inches	Number	Code		
POLYPRO STEEL PEDES	TRIAN Plair	End				
7 1-1/2 PPSP005A 237524						
	7	2	PPSP005B	237525		
	15	2	PPSP015A	237526		
	15	3	PPSP015B	237527		
	30	2	PPSP030A	237528		
	30	3	PPSP030B	237529		
	30	4	PPSP030C	237530		
	55	3	PPSP055A	237531		
	55	4	PPSP055B	237532		
	100	3	PPSP100A	237533		
	100	4	PPSP100B	237534		
	150	3	PPSP150A	237535		
	150	4	PPSP150B	237536		
	200	3	PPSP200A	237537		
	200	4	PPSP200B	237538		
	275	3	PPSP275A	237539		
	275	4	PPSP275B	237540		
	360	3	PPSP360A	237541		
	360	4	PPSP360B	237542		
	360	6	PPSP360C	237543		
	500	3	PPSP500A	237544		
	500	4	PPSP500B	237545		
	500	6	PPSP500C	237546		

Inlet/Outlet Significant Product

POLYPRO HD BOLTED FLAT Plain End



=			
7	1-1/2	PPHDF005A	237206
7	2	PPHDF005B	237207
15	2	PPHDF015A	237208
15	3	PPHDF015B	237209
30	2	PPHDF030A	237210
30	3	PPHDF030B	237213
30	4	PPHDF030C	237214
55	3	PPHDF055A	237215
55	4	PPHDF055B	237216
100	3	PPHDF100A	237218
100	4	PPHDF100B	237220
150	3	PPHDF150A	237224
150	4	PPHDF150B	237225
200	3	PPHDF200A	237226
200	4	PPHDF200B	237228
275	3	PPHDF275A	237230
275	4	PPHDF275B	237235
360	3	PPHDF360A	237236
360	4	PPHDF360B	237238
360	6	PPHDF360C	237239
500	3	PPHDF500A	237240
500	4	PPHDF500B	237245
500	6	PPHDF500C	237246

	Inlet / Outlet	Tank Size
INLET / OUTLET TANK	SIZES & CONNECTION	OPTIONS
	1-1/2" Plain End MPT, FPT, Flanged	5 gal to 55 gal
	2" Plain End MPT, FPT, Flanged	5 gal to 150 gal
	3" Plain End MPT, FPT, Flanged	15 gal to 500 gal
	3" Flanged	30 gal to 500 gal
	4" Plain End MPT, FPT, Flanged	30 gal to 2000 gal
	6" Flanged	360 gal to 2000 gal


PRODUCT SELECTION CHART						
	Gallons	Inlet/Outlet inches	Significant Number	Product Code		
HDPE NON-ADJUSTABL	e extensi	NC				
	5	6 to 9	PEEXT005	237462		
	15	6 to 14	PEEXT015	237463		
	30	6 to 24	PEEXT030	237464		
	55	6 to 31	PEEXT055	237465		
	100	6 to 35	PEEXT100	237466		
	150	6 to 43	PEEXT150	237467		
	200	6 to 43	PEEXT200	237468		
	275	6 to 42	PEEXT275	237469		
	360	6 to 42	PEEXT360	237470		
	500	6 to 54	PEEXT500	237471		
Polypro Non-Adjustable extensions are available upon request.						
VARIABLE EXTENSION	(2" of Verti	cal Adjustm	ent)			

	Inlet/Outlet inches	Significant Number	Product Code		
HDPE PLAIN END VENT	-				
	1-1/2	PEV150	237401		
	2	PEV200	237402		
	3	PEV300	237403		
	4	PEV400	237404		
HDPE MPT CONNECTION					
	1-1/2	MPTC150	237421		
	2	MPTC200	237422		
	3	MPTC300	237423		
	4	MPTC400	237424		




5/7	6 to 36	ADEXT005	237454
15	6 to 36	ADEXT015	237455
30	6 to 36	ADEXT030	237456
55	6 to 36	ADEXT055	237457
100	6 to 36	ADEXT100	237458
150	6 to 36	ADEXT150	237459
200	6 to 36	ADEXT200	237460
275	6 to 36	ADEXT275	237461
360	6 to 36	ADEXT360	_
500	6 to 36	ADEXT500	_

HDPE FPT CONNECTION



HDPE FLANGE CONNECTION




FRP OVERWRAP



5/7	-	FRP0005	237440
15	-	FRPO015	237441
30	_	FRP0030	237442
55	-	FRP0055	237443
100	-	FRPO100	237444
150	-	FRPO150	237445
200	-	FRP0200	237446
275	-	FRP0275	237447
360	_	FRP0360	237448
500	-	FRP0500	237449

FRP Overwrap is for tanks without extensions Please contact IPEX for FRP overwrap pricing on tanks with non-adjustable extensions .

POLYPRO PLAIN END VENT



POLYPRO MPT CONNECTION

1-1/2	MPTPP150	237156
2	MPTPP200	237157
3	MPTPP300	237158
4	MPTPP400	237159

HDPE & POLYPROPYLENE NEUTRALIZATION TANKS

PRODUCT SELECTION CHART

	Inlet/Outlet inches	Significant Number	Product Code		
POLYPRO FPT CONNECTION					
	1-1/2	FPTPP150	237139		
	2	FPTPP200	237140		
	3	FPTPP300	237148		
	4	FPTPP400	237149		

	Inlet/Outlet inches	Significant Number	Product Code	
THREADED MANWAY				
	8	TMW008	237450	
	16	TMW016	237451	
	22	TMW022	237452	

POLYPRO FLANGE CONNECTION



1-1/2	FLPP150	237116
2	FLPP200	237118
3	FLPP300	237120
4	FLPP400	237138

NEUTRALIZING AGENT LIMESTONE BAGS

50 lbs	TC50	237321	

NOTE: F.O.B.- Shipping Location

LIMESTONE LOADING GUIDE FOR NEUTRALIZATION

Tank Size	Loading (lbs.)
5	50
15	125
30	250
55	500
100	1000
150	1500
200	2000
275	2500
360	3500
500	5250
700	8000
1000	10000
1250	12000
2000	18000

MONITORING RECORDING & ALARM SYSTEMS

NEUTRASYSTEM2[™]

ADVANTAGES

NEMA 4X RATED, PH MONITORING SYSTEM UL 508 LISTED MONITORING AND ALARM PANEL,

CHEMICALLY RESISTANT PH PROBE FOR THE CONTINUOUS SAMPLING
OF THE DOWNSTREAM FLOW, WHILE KEEPING AN ACCURATE, PERMANENT RECORD OF PH DISCHARGE LEVELS AND,

VISUAL AND AUDIBLE ALARMS WHICH ARE TRIGGERED IF THE SYSTEM SENSES THAT

CONCENTRATIONS HAVE DRIFTED OUTSIDE PRE-SET PARAMETERS.





NEUTRASYSTEM PH MONITORING & RECORDING SYSTEM

Classification	Significant Number	Product Code
pH Monitor w/ Tank & Alarm	TPH501	237371
pH Monitor w/ Tank & Alarm & Chart	TPH502	237331
pH Monitor w/ Alarm	TPH503	237341
pH Monitor w/ Alarm & Chart	TPH504	237351

ACCESSORIES

acid waste systems, including:



MATERIALS AND ATTRIBUTES CHART

Resin	Color	Schedule	Length (inches)	Size (inches)	ASTM Rating	Classification
FRPP	Green	40	10/20	1-1/2 to 12	V-1	Self extinguishing. Does not support combustion after flame is removed.
NFRPP	Black	40/80	20	1-1/2 to 12	V-2	Suitable for locations where no burning classification is required.
FR-PVDF	Blue	40	10	1-1/2 to 4	V-0	Self extinguishing. Meets ASTM E-84. Suitable for areas such as return-air plenums and other specialized applications.

IPEX acid waste systems are designed and manufactured to meet or exceed the requirements of the following standards organizations. A comprehensive list of compliance approvals is available on request.











Consult the IPEX Chemical Resistance Guide, available at ipexinc.com, for compatibility of our acid waste systems with over 900 chemicals, at a full range of temperatures and concentrations.

INDUSTRIAL PRODUCTS

Xirtec 140® PVC - Corzan® CPVC

1/2" - 24" (15mm - 600mm) XIRTEC 140®: PVC Sch. 40 & 80 pipe & fittings systems.

CORZAN®: CPVC Sch. 80 pipe & fittings systems cell classification 24448 & 23447

PROCESS PIPING





Duraplus[™] ABS Industrial

3/8" - 12" (10mm - 300mm) Complete ABS pressure pipe, valves & fitting systems.





1/2" - 4" (15mm - 100mm)

High-purity polypropylene pipe, valves and fittings with a socket fusion joining system.






Guardian™

SYSTEMS

Carrier: 1/2" - 12" (15mm - 300mm) Containment: 2" - 18" (50mm - 450mm) Vinyl double containment and leak





CONTAINMENT

Encase™

1-1/2" - 12" (40mm - 300mm)

Polypropylene double containment system for corrosive waste drainage consisting of an electrofusion fitting with a heavy-gauge resistance wire molded into the socket.










(H)) (42) (ISI

Clear-Guard

1/2" - 8" (15mm - 200mm)

Fully pressure rated clear containment PVC system with Guardian's patented





CustomGuard®

Carrier: 1/2" - 20" (15mm - 500mm) Containment: 2" - 26" (50mm - 660mm) Custom designed and fabricated double containment systems for similar & dissimilar materials.



Centra-Guard™

Patented electronic low point leak detection system for above ground and below grade piping systems.



A microprocessor based system for continuous leak detection.



THERMOPLASTIC VALVES

Thermoplastic Valves

1/2" - 12" (12mm - 300mm)

IPEX offers a variety of manual & actuated valves in PVC, CPVC, PP, PVDF and ABS.





Duratec® Airline

3/8" - 1" (9.5mm - 25mm) Composite pipe and fittings for conveying compressed air and





Duraplus™ Airline

1/2" - 8" (12mm - 200mm)

A high-impact, ductile ABS pressurized piping system for conveying compressed air and inert gases. 删



SPECIALTY

Ventilation Duct

6" - 24" (150mm - 600mm) Diameter Seamless PVC ventilation duct systems.





Grooved PVC Pipe

COMPRESSED AIR

2" - 24" (50mm - 600mm) Schedule 40, SDR 26 and SDR 21 factory-grooved PVC pipe.









SALES AND CUSTOMER SERVICE

Call IPEX Inc

Toll Free: (866) 473-9462

www.ipexinc.com

About the IPEX Group of Companies

As leading suppliers of thermoplastic piping systems, the IPEX Group of Companies provides our customers with some of the world's largest and most comprehensive product lines. All IPEX products are backed by more than 50 years of experience. With state-of-the-art manufacturing facilities and distribution centers across North America, we have earned a reputation for product innovation, quality, end-user focus and performance.

Markets served by IPEX group products are:

- Electrical systems
- · Telecommunications and utility piping systems
- Industrial process piping systems
- · Municipal pressure and gravity piping systems
- Plumbing and mechanical piping systems
- Electrofusion systems for gas and water
- Industrial, plumbing and electrical cements
- Irrigation systems
- PVC, CPVC, PP, PVDF, PE, ABS, and PEX pipe and fittings

Products are manufactured by IPEX Inc.

EncaseTM, EnfieldTM, FlowayTM, Labline®, Neutrasystem 2^{TM} , Neutratank®, and PlenumlineTM, are trademarks of IPEX Branding Inc.

This literature is published in good faith and is believed to be reliable. However, it does not represent and/or warrant in any manner the information and suggestions contained in this brochure. Data presented is the result of laboratory tests and field experience.

A policy of ongoing product improvement is maintained. This may result in modifications of features and/or specifications without notice.

